
>MONTAGEANLEITUNG
ASSEMBLY INSTRUCTIONS
NOTICE DE MONTAGE
INSTRUZIONI PER IL MONTAGGIO

TYP LD 8003 E-SMD

Einbauleuchte/recessed luminaire

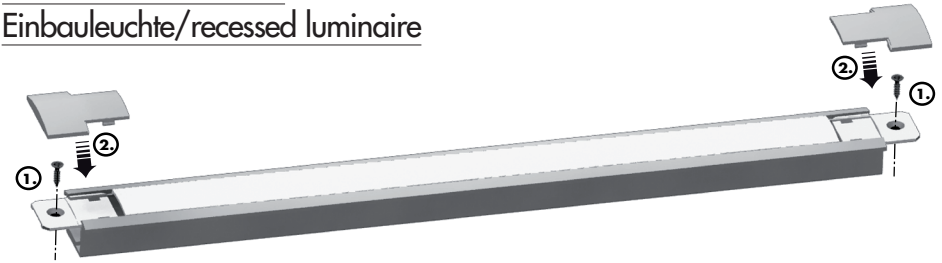


Geeignet zum Anbau an / in Möbel

suitable for installation on / into furniture

Schutzklasse III

class of protection III

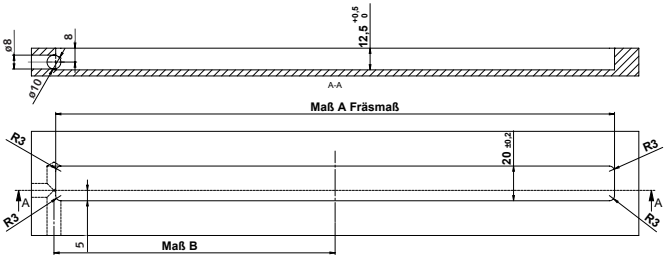

Anschluss der Leuchte nur an Sicherheitskleinspannung (SELV) aus LED-Driver 24 V nach EN 61347-2-13 und EN 62384. Min.- und Maxleistung beachten!

LED-Module können nicht ausgetauscht werden.
Die Anschlussleitung der Leuchte ist nicht austauschbar. Falls die Leitung beschädigt ist, darf die Leuchte nicht mehr betrieben werden und ist zu entsorgen.

Connection of luminaire only on safety extra-low voltage (SELV) from LED-Driver 24 V in accordance with standards EN 61347-2-13 and EN 62384. Pay attention to min. and max. loads!
LED-Modules cannot be exchanged.

If the supply lead is damaged the light may not be used any longer and has to be disposed of.

Typ	V	Wattage	Maß A +0,5	Maß B
LD 8003 E-SMD 163	24	1,5	139	69
LD 8003 E-SMD 313	24	4,0	289	144
LD 8003 E-SMD 363	24	5,0	339	169
LD 8003 E-SMD 413	24	5,5	389	194
LD 8003 E-SMD 430	24	5,5	406	202,5
LD 8003 E-SMD 463	24	6,5	439	219
LD 8003 E-SMD 513	24	7,5	489	244
LD 8003 E-SMD 563	24	8,0	539	269
LD 8003 E-SMD 613	24	9,0	589	294
LD 8003 E-SMD 713	24	10,5	689	344
LD 8003 E-SMD 763	24	11,5	739	369
LD 8003 E-SMD 813	24	12,0	789	394
LD 8003 E-SMD 839	24	13,0	815	407
LD 8003 E-SMD 863	24	13,0	839	419
LD 8003 E-SMD 913	24	14,0	889	444
LD 8003 E-SMD 1063	24	16,5	1039	519
LD 8003 E-SMD 1113	24	17,0	1089	544

MA Art.-Nr. 540 150 21 01/14

ELEKTRA

ELEKTRA GMBH
Werkstraße 7
D-32130 Enger
Telefon 0 52 23/185-0
Fax 0 52 23/1 72 56